



Certified according to European Standard EN 1176 by the German TÜV - SÜD. Round tubular structure in painted electro galvanized steel and baked finishing at 180°C. Composed by an horizontal beam Ø 60 mm and n° 4 oblique shaped poles Ø 55 mm connected through appropriate welded joints to the beam. N° 1 flat or cradle seat, made in impact-resistant rubber with aluminium core and available with hot dipped galvanized small mesh chains. Alternatively, one polyethylene seat appropriate for physically challenged children can be installed. Assembly system with 8.8 galvanized steel bolts and self-locking nuts. Colored nylon cap nuts as required by law. Polyester powder coating at 180°C. with very high resistance to atmospheric agents and UV rays. Polyethylene post caps.



cm 270x160x242h
INGOMBRO MAX



140
ALTEZZA CADUTA



3-8
ETÀ D'USO



h 2
TEMPO DI ASSEMBLAGGIO



1
NUMERO UTILIZZATORI




cm 750x570
SPAZIO MINIMO



m² 14
AREA IMPATTO

Planimetria / Planimetry

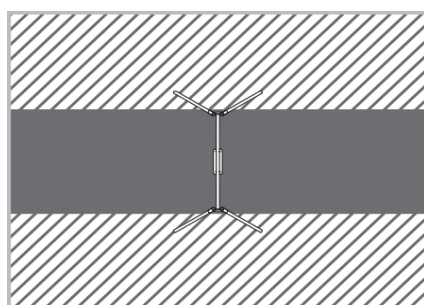

Opzione sedute / Swing seat options

