Leg Extension Machine

Codice: **1652**



In accordance with the European Standard EN 16630. Structure composed by structural posts sized 200x120mm, made of 3mm S235J-grade steel; Anchoring posts sized 300x300mm, made of 10mm S235J-grade steel, with pilot holes for anchoring to the ground or to anchors; Casings and surface details made of laser-cut, 3–10mm S235J-grade steel; Seating made of 19mm two-colour HDPE, with UV-proof pigmentation, rounded edges, and non-slip textured surface; Handles sized 30mm, made of 2mm S235J-grade steel; Steel bearings sized 37mm, in watertight casings; Vibration damper and limit stop sized 50mm and made of rubber, with M10 threaded stud; Pair of lifting bars sized Ø60mm, made of black polyethylene. Assembly system with 8.8 galvanized steel bolts and self- locking nuts. Nut caps made of engineering plastic as required by law. Finishing of fitness equipment: sandblasting, protective primer, bed-dip coating in grey and black RILSAN. Finishing of structural posts: sandblasting, cold galvanizing, RAL 9005 powder coating. ***Available in the following versions:***

- Type **A** (TO PLOUGH IN) with hot-dip galvanized steel anchors;
- Type B (TO FIX ON THE FLOOR), with hot-dip galvanized steel brackets for fixing using *"FISHER"* type anchors or similar, **NOT SUPPLIED.**

Supplied in an **assembly-kit.**

cm 1060x580x1100h
INGOMBRO MAX

100
ALTEZZA CADUTA


1h
TEMPO DI ASSEMBLAGGIO

1
NUMERO UTILIZZATORI

cm 410x360
SPAZIO MINIMO

m² 0,00
AREA IMPATTO

Planimetria / Planimetry

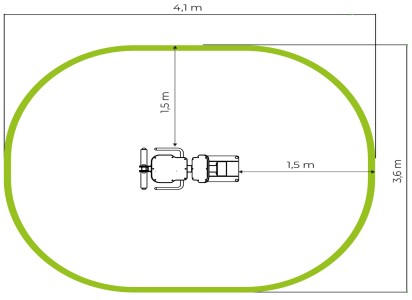

DIMO GROUP S.r.l. - Zona P.I.P. • 73055 Racale (LE) - Italia • Tel. (+39) 0833.555388 - Fax (+39) 0833.556155 • info@dimogroup.com • www.giochipark.com